

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 063 819 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
27.12.2000 Bulletin 2000/52

(51) Int Cl.<sup>7</sup>: H04L 12/56, H04L 12/28,  
H04L 29/06

(21) Application number: 99112129.4

(22) Date of filing: 23.06.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Kraiem, Besma, c/o Sony Int.(Europe) GmbH  
70736 Fellbach (DE)  
• Enderlein, Janos, c/o Sony Int.(Europe) GmbH  
70736 Fellbach (DE)

(71) Applicant: Sony International (Europe) GmbH  
10785 Berlin (DE)

(74) Representative:  
MÜLLER & HOFFMANN Patentanwälte  
Innere Wiener Strasse 17  
81667 München (DE)

## (54) Calibration procedure for wireless networks with direct mode traffic

(57) A calibration procedure of wireless networks to create a topology map mainly consists of two phases: a measurement phase during which each wireless device, i. e. all mobile terminals and the central controller, transmits a calibration signal in broadcast mode (S2, S3, S4) and each other wireless device measures the received signal quality and the reporting phase during which each mobile terminal reports the measured results to the central controller of the network (S6, S7). Both of these phases are preferably initiated by the central controller,

the measurement phase with the broadcast of a measurement control signal to all mobile terminals (S1) and the reporting phase with the broadcast of a reporting control signal to all mobile terminals (S5). Based on all measurement results the central controller creates a topology map of the network once all reports have been received. This topology map is updated in two cases, namely when a new device joins the network with a high priority calibration and when a timer expires with a low priority calibration, i. e. only when there are enough free resources.

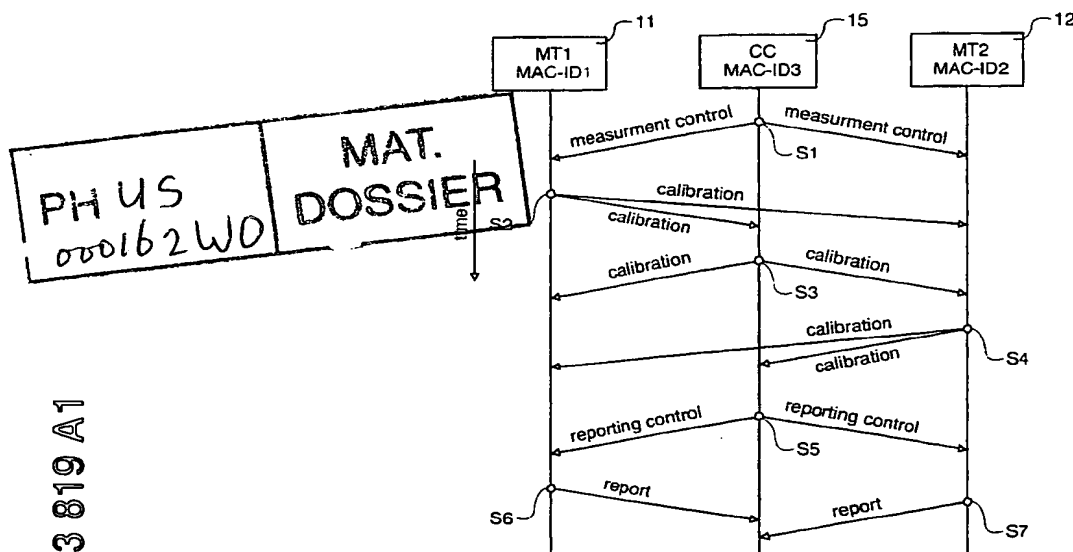


Fig. 2

## Description

[0001] The present invention relates to the calibration procedure for wireless networks with direct mode traffic, and in particular to the creation of a topology map indicating the quality of connectivity of each wireless device of a wireless network with all other wireless devices in said wireless network.

[0002] A typical wireless network, such as the IEEE 1394 based HIPERLAN type 2 broadband radio access network which specification is developed by ETSI is shown in Fig. 3. An access point or central controller 15 has an up- and downlink communication with several mobile terminals 11, 12, 13, and 14 and the mobile terminals can also have a direct communication in-between each other so that apart from the granting of resources for peer mobile terminals, e. g. the first mobile terminal 11 and the second mobile terminal 12, the access point or central controller 15 is not involved in the communication. Such direct communications in-between two or more mobile terminals are called direct mode. An IEEE 1394 bus with connected network devices is exemplary shown only for the fourth mobile terminal 14.

[0003] The problem in wireless networks including direct mode traffic is that the mobile terminals do not know with which other devices they have radio link. Thus, they intend to request the central controller 15 to set up certain connections even though they are not possible. A second problem is the transmit power control during direct mode traffic. Without knowledge about the radio link quality always maximum transmit power levels have to be used until appropriate levels are identified.

[0004] Therefore, a topology map has been introduced indicating the quality of connectivity of each network device of a wireless network with all other network devices in said wireless network. After distribution of this topology map, a mobile terminal can check whether a connection is possible or not before requesting it with the central controller. Furtheron, transmit power control can be performed using an initial power level determined on the quality of connectivity of the particular radio link.

[0005] Also, in case the topology map of the wireless network is not distributed in the whole network, but only stored within the central controller enables the central controller to accept or reject connection requests between two wireless devices depending on the radio link quality. Furthermore, once the topology map has been created, the central controller can inform the peer wireless devices to set up their transmit power levels accordingly until accurate transmit power control is performed.

[0006] Therefore, it is the object of the present invention to provide a method to create a topology map indicating the quality of connectivity of each network device of a wireless network with all other network devices in said wireless network. Furtheron, it is the object of the present invention to provide network devices that are adapted to work according to the inventive method.

[0007] These objects are solved by the inventive method to create a topology map according to independent claim 1 and network devices for a wireless network according to independent claims 13 and 18. Preferred embodiments thereof are respectively defined in the respective dependent claims.

[0008] A method to create a topology map indicating the quality of connectivity of each network device of a wireless network with all other network devices in said wireless network according to the present invention comprises the following steps: performing a measurement phase in which a calibration signal is successively broadcasted by each network device and in which all respective other network devices receiving said calibration signal measure the received signal quality; performing a reporting phase in which the measurement results are transmitted from each network device to the network device creating said topology map; and performing a creating phase in which said topology map of the network is created within the network device creating said topology map on basis of all received measurement results.

[0009] Therefore, according to the present invention a very quick creation of the topology map is possible, since no bandwidth is wasted transmitting small amounts of data, namely single measurement results, from the network devices that have measured the received signal quality of one control signal to the network device creating said topology map, but since first all measurement results are collected before they are transmitted to the network device creating the topology map.

[0010] Preferably said measurement phase and/or said reporting phase are initiated by the network device creating the topology map.

[0011] Further, preferably the topology map is updated when a new network device joins the network and/or after a predetermined amount of time has lapsed.

[0012] A first type of network device for a wireless network according to the present invention is characterized by means to broadcast a calibration signal, to measure a power level of a received calibration signal, and to transmit its measurement results to another network device or to store it internally.

[0013] Preferably these functions are carried out on demand of another network device, but they can also be carried out on an internal demand. Therefore, the network device according to the present invention preferably comprises a decoder that initiates the broadcast of a control signal and the measurement of the reception quality of one or more incoming broadcast signals upon reception of a measurement control signal and that further preferably initiates the transmission of one or more measurement results upon reception of a reporting control signal.

**[0014]** Preferably the network device according to the present invention is characterized by a report encoder that receives one or more signal quality indication signals and encodes therefrom a signal quality control signal to be transmitted to said other network device or to be stored internally.

**[0015]** A second type of network device according to the present invention is characterized by means to initiate a measurement phase, to initiate a reporting phase, and to perform a creation of a topology map on basis of measurement results received during the reporting phase.

**[0016]** This second type of network device preferably includes all features of the first type of network device according to the present invention.

**[0017]** The first type of network device according to the present invention is either a mobile terminal or a mobile terminal having the functionality of a central controller, whereas the second type of network device according to the present invention always has the functionality of a central controller.

**[0018]** The present invention and its numerous embodiments will be better understood on basis of the following exemplary description thereof taken in conjunction with the accompanying drawings, in which

**Fig. 1** shows a network device according to the present invention;

**Fig. 2** shows the messaging in-between the central controller and two mobile terminals during the calibration procedure to create the topology map; and

**Fig. 3** shows an exemplary wireless network.

**[0019]** The mobile terminal shown in Fig. 1 is adapted to perform a direct mode calibration according to the present invention. The shown mobile terminal has one antenna 1 which is connected to the movable terminal of a transmit/receive selection switch 2 which fixed terminals are respectively connected to the transmitter and receiver signal path of the mobile terminal. In the receiver signal path a receiver 3 is directly connected to the respective fixed terminal of the transmit/receive selection switch 2. This receiver 3 produces a data and control signal input to a controller 6 and also outputs a signal whorfom a signal quality measurement unit 5 can determine the received signal strength which is output to the controller 6. For the transmitter signal path the controller 6 outputs a data and control signal to a transmitter 4 which modulates, up-converts and amplifies this signal to a given signal strength which is indicated to the transmitter 4 by a control signal generated by the controller 6 and outputs the generated transmission signal to the respective fixed terminal of the transmit/receive selection switch 2. Bi-directionally connected to the controller are a user interface 7 and a memory 8. Furtheron, the controller 6 is connected to a direct mode calibration decoder 9 and a direct mode report encoder 10.

**[0020]** The direct mode calibration decoder 9 receives the control signals generated by the receiver 3 via the controller 6 and initiates the broadcast of a calibration signal and the measurement of the reception quality of one or more incoming broadcasted calibration signals from other mobile terminals upon reception of a measurement control signal which is transmitted from the central controller 15. Furtheron, upon reception of a reporting control signal which is also transmitted from the central controller 15 the direct mode calibration decoder 9 initiates the transmission of one or more measurement results to said central controller 15. Therefore, all measurement results stored within the memory 8 are communicated to the direct mode report encoder 10 by the controller 6 and said direct mode report encoder 10 generates a signal quality control signal that is transmitted via the controller 6 and the transmitter 4 to the central controller 15. The central controller 15 creates a topology map on basis of all measurement results received from all mobile terminals during the reporting phase.

**[0021]** In the following the calibration procedure will be described in connection with Fig. 2 which shows the messaging in-between the central controller 15 having a medium access control identifier, i. e. MAC-ID3, and a first mobile terminal 11 having a MAC-ID1 and a second mobile terminal 12 having a MAC-ID2, after the calibration procedure is decided to be started, since either a new mobile terminal joins the network or a timer has expired.

**[0022]** In a first step S1 the central controller 15 send measurement control signals to both mobile terminals 11 and 12. Of course, the central controller 15 itself knows that the measurement phase of the calibration procedure will be performed. Therefore, after the first step S1 all three network devices, namely the central controller 15 and the first and second mobile terminals 11 and 12, are initialized to perform the measurement phase. During the measurement phase all network devices within the wireless network successively broadcast a calibration signal and receive the calibration signals transmitted by the other network devices to determine their respective signal quality. Therefore, in a step S2 the first mobile terminal 11 broadcasts its calibration signal to the central controller 15 and the second mobile terminal 12 which receive said calibration signal, measure its signal quality, and store it in an internal memory.

**[0023]** Thereafter, the central controller 15 itself performs the broadcast of a calibration signal to the first and second mobile terminals 11 and 12 in a step S3. Both mobile terminals 11 and 12 respectively receive the calibration signal, measure its signal quality and store this value in an internal memory. Following in a step S4 the second mobile terminal 12 also broadcasts a calibration signal to the first mobile terminal 11 and the central controller 15 which respectively receive this calibration signal, measure its signal quality and store this measured value in an internal memory. After all

mobile terminals have broadcasted their calibration signals and these calibration signals are received and measured by all respective other devices, the central controller 15 transmits a reporting control signal in a step S5 to the first mobile terminal 11 and the second mobile terminal 12. After reception of the reporting control signal, both mobile terminals generate a signal quality control signal comprising one or more measurement results and transmit it respectively to the central controller 15. The first mobile terminal 11 transmits its signal quality control signal in a step S6 to the central controller 15 and the second mobile terminal 12 transmits its signal quality control signal to the central controller 15 in a step S7.

[0024] Of course, the central controller 15 knows its own measurement results, since they are already stored in its internal memory. Upon reception of all measurement results from all other mobile terminals within the network, the central controller 15 generates the topology map which indicates the reception quality for every radio link available within the network.

[0025] To summarize the above procedure it can be said that the calibration procedure mainly consists of two phases, namely the measurement phase and the reporting phase. In an exemplary embodiment of an IEEE 1394 based HIPERLAN type 2 network during the measurement phase the calibration slot is transmitted using a dedicated control channel. It contains the source identifier. The calibration slot is transmitted using the maximum allowed transmit power level in order to avoid artificial hidden nodes. Each other wireless device measures the received quality, e. g. by means of the received signal strength and stores it in an internal memory. During the reporting phase each wireless device reports its measurement results to the central controller using a dedicated control channel. The report slot contains the identifier of the wireless device and the report measurements. One or more measurement results can be transmitted in one report slot.

[0026] Once all wireless devices have reported their measurement results to the central controller, the central controller (in a third phase) creates a topology map of the network which indicates the quality of connectivity of each wireless device with all others. A possible topology map of a network with n active devices represented into a matrix is shown below:

	MAC-ID 1	MAC-ID 2	MAC-ID 3	...	...	...	MAC-ID n
MAC-ID 1		RSS 1-2	RSS 1-3	...	...	...	RSS 1-n
MAC-ID 2	RSS 2-1		RSS 2-3	...	...	...	RSS 2-n
MAC-ID 3	RSS 3-1			...	...	...	RSS 3-n
...	...	...	...	...	...	...	...
...	...	...	...	...	...	...	...
...	...	...	...	...	...	...	...
MAC-ID n	RSS n-1	RSS n-2	RSS n-3	...	...	...	

[0027] RSS n-m represents the received signal strength at mobile terminal n when transmitted by mobile terminal m. The central controller is also regarded as mobile terminal, since in a wireless network environment with mobile terminals the task of the central controller might be switched from one mobile terminal to another. According to the example shown hereinafter 4 bits are used to map the received signal quality, i. e. the received power to a signal strength code. Therefore, there exist sixteen possibilities of designated received power levels to be included in the topology map. According to the shown example, a bandwidth of < -90 dBm to > -30dBm is set with a step size of 3 dB and a range of -69 dBm to -48 dBm as a medium range mapped to one coding value.

RSS2	Received Power at ARP [dBm]	Step Size
0000	< -90 dBm (no radio link)	

(continued)

RSS2	Received Power at ARP [dBm]	Step Size
0001	-90	3 dB
0010	-87	
0011	-84	
0100	-81	
0101	-78	
0110	-75	
0111	-72	
1000	-69 ... -48	21 dB
1001	-45	3 dB
1010	-42	
1011	-39	
1100	-36	
1101	-33	
1110	-30	
1111	> -30 dBm	

[0028] Of course, any other mapping e. g. in a strictly linear or non-linear fashion can be performed as well.

[0029] An update of the topology map is always triggered by the central controller. It is started as a high priority calibration when a new mobile terminal joins the network so that an updated topology map is nearly immediately created, e. g. within 2 ms. Furtheron, a low priority calibration is started every time when a timer expires, e. g. every 100 ms. Low priority in this sense means that the calibration is carried out every time free resources are available.

[0030] The topology map of the network might be broadcast by the central controller to all mobile terminals and depending on the used system it might be transmitted as a whole or line by line. A mobile terminal receiving the topology map preferably stores this topology map together with a time stamp. Another possibility to give knowledge about the network topology to a mobile terminal is to just transmit a particular line or value of the topology map to the corresponding network device.

[0031] Of course, the present invention is not only to be used with an IEEE 1394 based HIPERLAN type 2 network, but with any wireless network, preferably with such supporting direct mode.

## Claims

- Method to create a topology map indicating the quality of connectivity of each network device of a wireless network with all other network devices in said wireless network, **characterized by** the following steps:
  - performing a measurement phase in which a calibration signal is successively broadcasted by each network device and in which all respective other network devices receiving said calibration signal measure the received signal quality;
  - performing a reporting phase in which the measurement results are transmitted from each network device to the network device creating said topology map; and
  - performing a creating phase in which said topology map of the network is created within the network device creating said topology map on basis of all received measurement results.
- Method according to claim 1, **characterized in** that said calibration signal is transmitted in a dedicated control channel.
- Method according to claim 1 or 2, **characterized in** that said measurement results are reported in a respective

dedicated control channel.

4. Method according to anyone of the preceding claims, **characterized in** that said calibration signal is transmitted with the maximum allowed transmit power level.
5. Method according to anyone of the preceding claims, **characterized in** that said topology map is updated when a new network device joins the network.
6. Method according to anyone of the preceding claims, **characterized in** that said topology map is updated after a predetermined amount of time.
7. Method according to anyone of the preceding claims, **characterized in** that said topology map is stored in the central controller.
8. Method according to anyone of the preceding claims, **characterized in** that said topology map is broadcasted in the whole network.
9. Method according to anyone of claims 1 to 7, **characterized in** that only the parts of the topology map related to a specific network device are transmitted to said specific network device.
10. Method according to anyone of the preceding claims, **characterized in** that said calibration signal is transmitted using an omni-directional antenna.
11. Method according to anyone of the preceding claims, **characterized in** that the contents of the topology map are codes that are mapped to receive power values.
12. Method according to anyone of the preceding claims, **characterized in** that said measurement phase and/or reporting phase is initiated by the network device creating said topology map.
13. Network device for a wireless network, **characterized by** means to broadcast a calibration signal, to measure a power level of a received calibration signal, and to transmit its measurement results to another network device or to store it internally.
14. Network device according to claim 13, **characterized in** that said functions are performed on demand of another network device or on an internal demand.
15. Network device according to claim 13 or 14, **characterized by** a calibration decoder (9) that initiates the broadcast of a calibration signal and the measurement of the reception quality of one or more incoming calibration signals upon reception of a measurement control signal.
16. Network device according to claim 15, **characterized in** that said calibration decoder (9) initiates the transmission of one or more measurement results upon reception of a reporting control signal.
17. Network device according to anyone of claims 13 to 16, **characterized by** a report encoder (10) that receives one or more signal quality indication signals and encodes therefrom a signal quality control signal to be transmitted to said other network device.
18. Network device for a wireless network, **characterized by** means to initiate a measurement phase, to initiate a reporting phase and to perform a creation of a topology map on basis of measurement results received during the reporting phase.
19. Network device according to claim 18 including the features of anyone of claims 16 to 20.

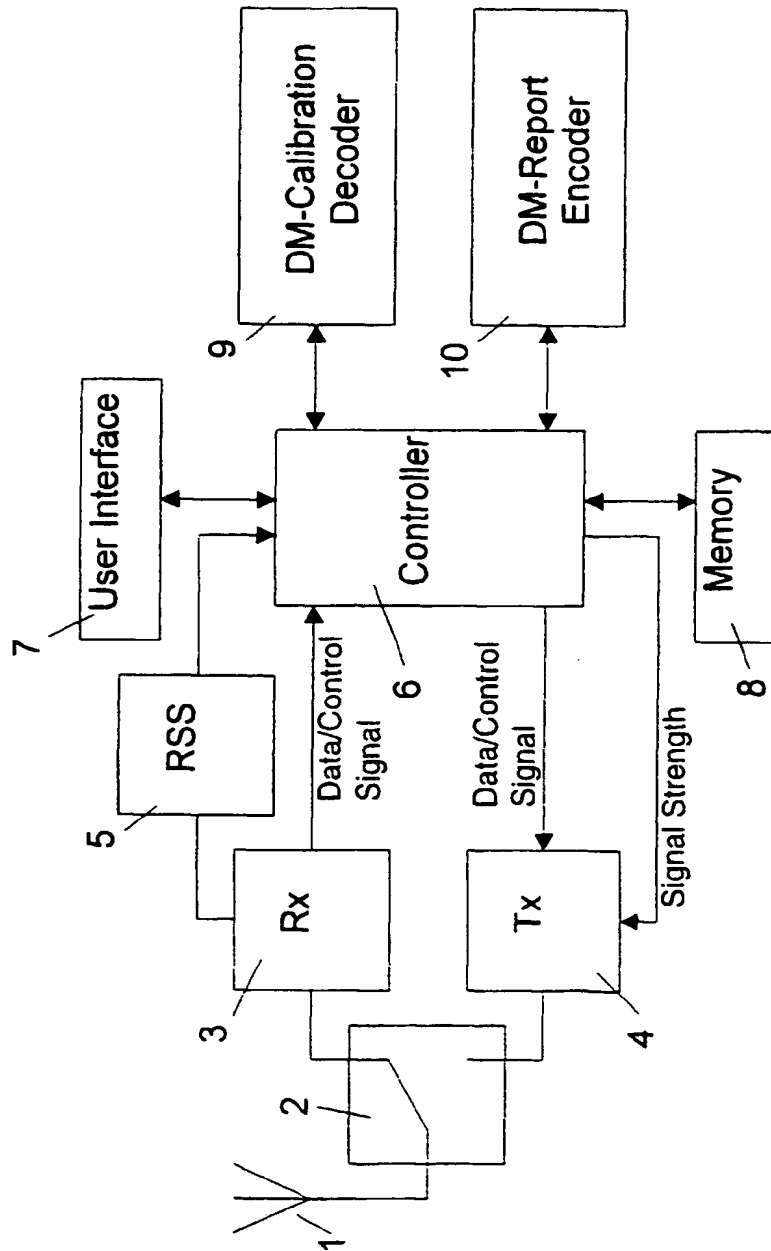


Fig. 1

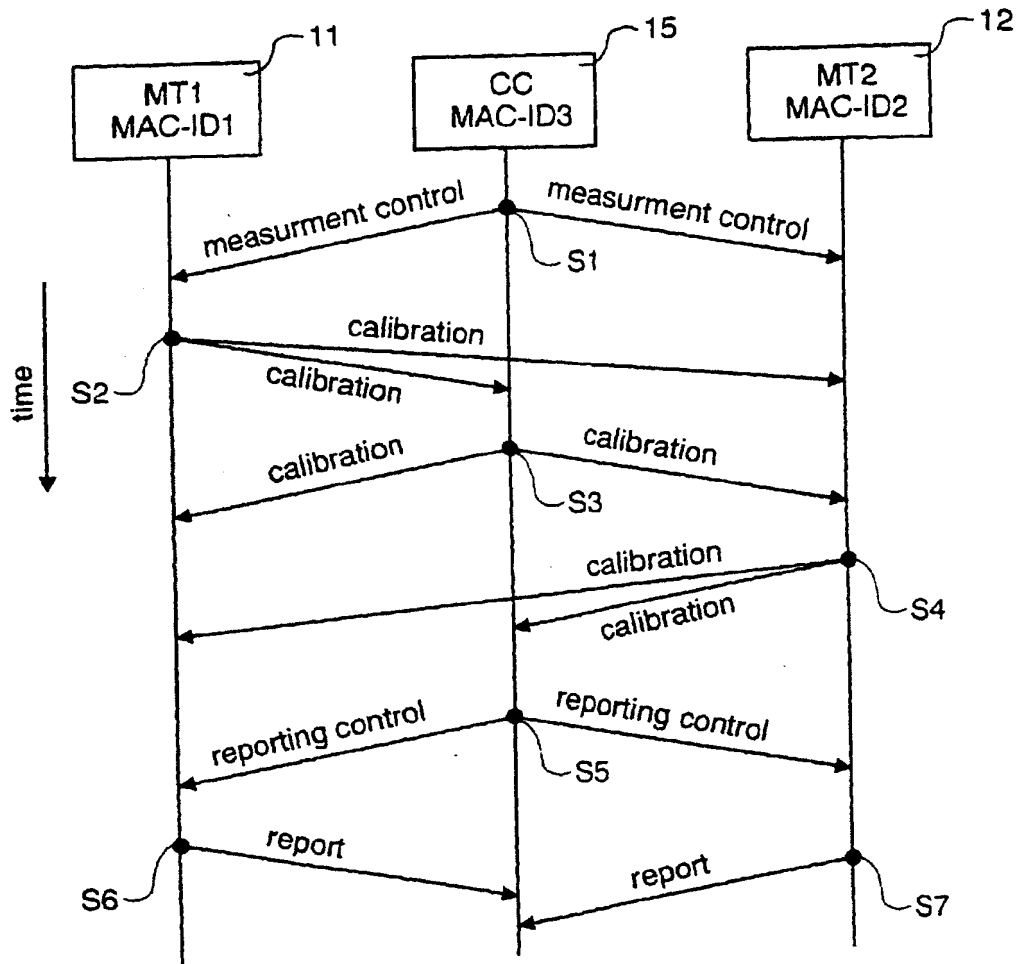


Fig. 2



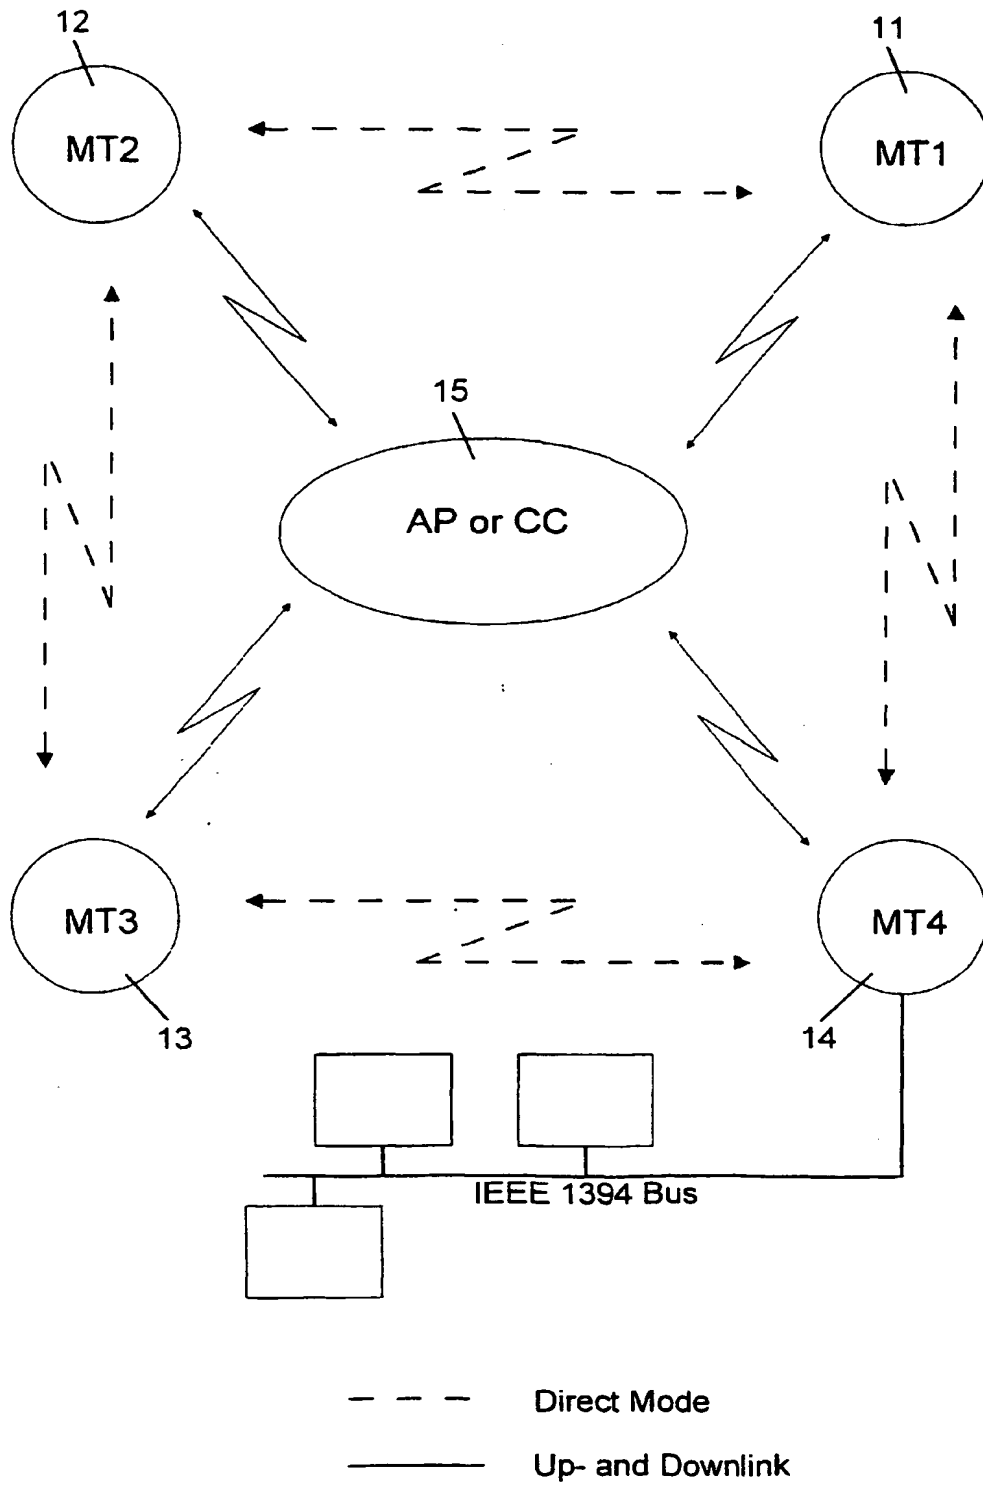


Fig. 3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 11 2129

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	EP 0 695 059 A (IBM) 31 January 1996 (1996-01-31)  * column 4, line 38 - column 5, line 40 * * column 8, line 12 - column 9, line 38; figure 1 *	1,2, 5-14,18, 19	H04L12/56 H04L12/28 H04L29/06
Y	US 5 862 477 A (HAMEL PIERRE-ANTOINE BERTRAND ET AL) 19 January 1999 (1999-01-19) * column 5, line 46 - column 6, line 28; figure 1 *	1,6,7, 10-14, 18,19	
Y	WO 98 56140 A (TOMLINSON KERRY JOHN ;LARSEN MARK SIEVERT (ZA); SALBU RES AND DEV) 10 December 1998 (1998-12-10) * page 2, paragraph 1 - page 3, paragraph 4 * * page 11, paragraph 5 - page 12, paragraph 1 *	2,8	
A		3,4	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Y	US 5 430 729 A (RAHNEMA MOE) 4 July 1995 (1995-07-04) * column 15, line 50 - line 64 *	9	H04L
Y	US 5 546 540 A (WHITE GERARD) 13 August 1996 (1996-08-13) * column 2, line 24 - line 39 * * column 4, line 9 - line 21 *	5	
A	EP 0 853 400 A (THOMSON BRANDT GMBH ;DEUTSCHE FORSCH LUFT RAUMFAHRT (DE)) 15 July 1998 (1998-07-15) * page 4, line 7 - line 22 *	15-17	
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>6 October 1999</b>	Examiner <b>Brichau, G</b>
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03.82 (Pp/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 11 2129

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-10-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0695059 A	31-01-1996	CA 2129199 A	30-01-1996
		JP 8065306 A	08-03-1996
		US 5812531 A	22-09-1998
US 5862477 A	19-01-1999	US 5711000 A	20-01-1998
WO 9856140 A	10-12-1998	AU 7781798 A	21-12-1998
US 5430729 A	04-07-1995	CA 2142152 A	05-10-1995
		CN 1115529 A	24-01-1996
		DE 19505905 A	05-10-1995
		FR 2718314 A	06-10-1995
		GB 2288296 A,B	11-10-1995
US 5546540 A	13-08-1996	NONE	
EP 0853400 A	15-07-1998	DE 19700303 A	16-07-1998
		JP 10242931 A	11-09-1998

EPO FORM P0489

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**